



# FASTENING SYSTEMS OVER THE YEARS

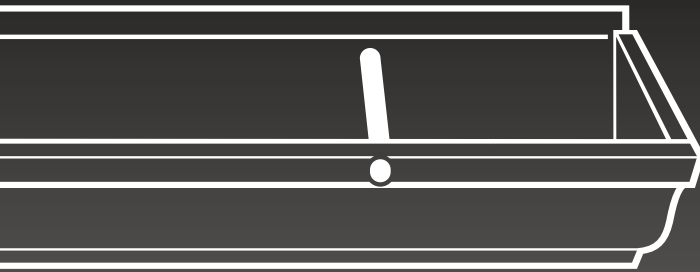

**1980**

**SPIKES AND FERRULES**

**1990**  
**SPACED HANGERS**

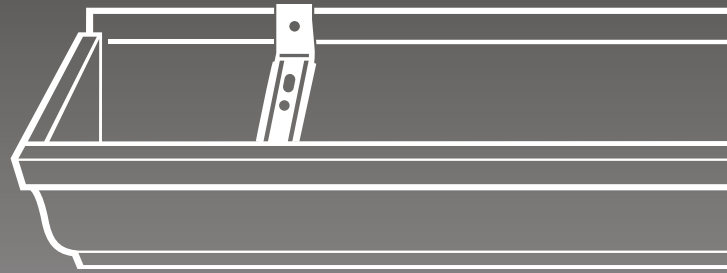

**TODAY**  
**CONTINUOUS HANGERS™**

The Continuous Hanger™ is the only fastening system that ensures gutters remain strong and rigid along their entire length. It eliminates the weaknesses that other systems generate between nails and spaced hangers.



# THE ALU-REX PRODUCT HANGERS AT A GLANCE

## INSTALLATION OF NEW GUTTERS

**T-Rex®** is a continuous fastening system for gutters. It mounts rain gutters solidly on houses, making them much sturdier and longer-lasting than those mounted with spikes and hangers spaced at intervals.

**Hover™** is the improved continuous fastening system that allows gutters to be suspended instead of screwing through them using the patented Floating™ technology. It is compatible with hemmed-back gutters.



## COMPLETE INSTALLATION AND PROTECTION SOLUTIONS FOR NEW GUTTERS

**DoublePro®** is a patented dual-action gutter protection system. This Continuous Hanger™ with built-in guard is designed to stand up to the worst weather conditions in North America and keep your gutters free of debris and ice year after year.

**HoverPro™** is the improved continuous fastening system with built-in guard that allows gutters to be suspended instead of screwing through them using the patented Floating™ technology. It is compatible with hemmed-back gutters.



**LIFETIME  
WARRANTY**  
STURDINESS

**LIFETIME  
WARRANTY**  
CLOG-FREE & STURDINESS

t rex®

# CONTINUOUS HANGER™ FOR RAIN GUTTERS



**LIFETIME  
WARRANTY  
STURDINESS**




## Sturdy Aluminum

Made from aluminum grade 3105 H24, with a sturdy 0.0175" thickness, our product guarantees remarkable strength. Count on its durability for top-notch performance in any setting.



## Self-Sealing Screws

The hanger is installed with black Dracotized self-sealing screws, steel-made #10 - 1½" (38 mm) in size, with ¼" (6.4 mm) hexagon heads and integrated rubber gaskets. It reinforces the gutter and reduces the risk of water seeping into the fascia. Screws are included with the product.

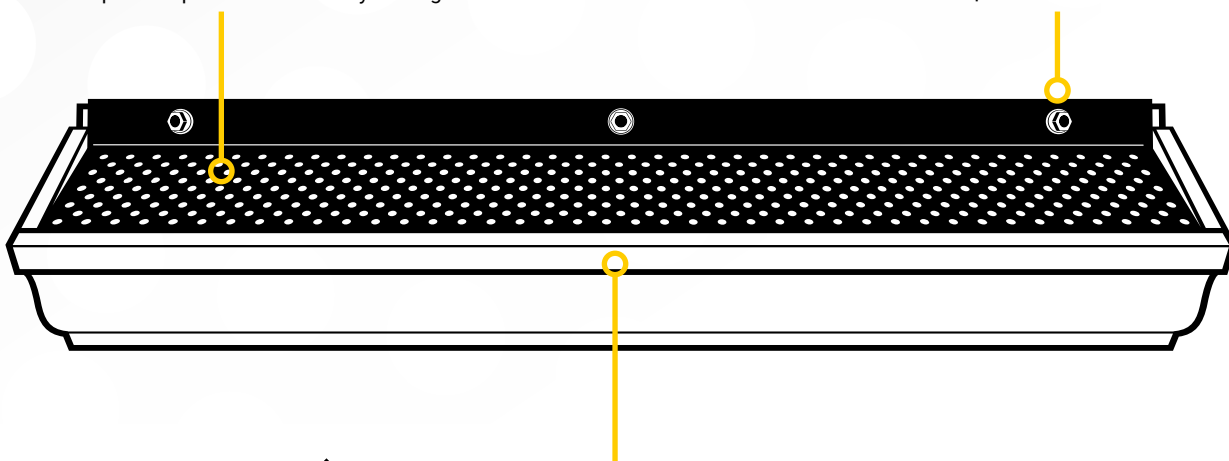

## Unparalleled Strength

With the T-Rex® Continuous Hanger™, your rain gutters are reinforced from end to end, ensuring uniform support across the entire length with no weak points. It can hold 250 lb (113 kg) per linear foot.



**WATCH THE QUICK STEPS  
OF AN INSTALLATION**

See how it saves time,  
cuts costs, and lets  
you sell more jobs.



**WATCH  
PRODUCT VIDEO**

gutter  clean<sup>SYSTEM®</sup>


## RETRO FIT RAIN GUTTER PROTECTION

The Gutter Clean System<sup>®</sup> is professionally installed over rain gutters without replacing them, keeping leaves and debris from getting into and clogging the gutters.




### flexi<sup>®</sup>seal™ TECHNOLOGY

The flex-Seal™ technology is made of materials resistant to UV rays, mold and temperature variations ensuring, that the back of the gutter is watertight.



### alu<sup>®</sup>perf™ TECHNOLOGY

Alu-perf™ technology's optimized perforations size create the perfect combination of maximum drainage and minimum debris. It drains 29.7" (754 mm) of water per hour.

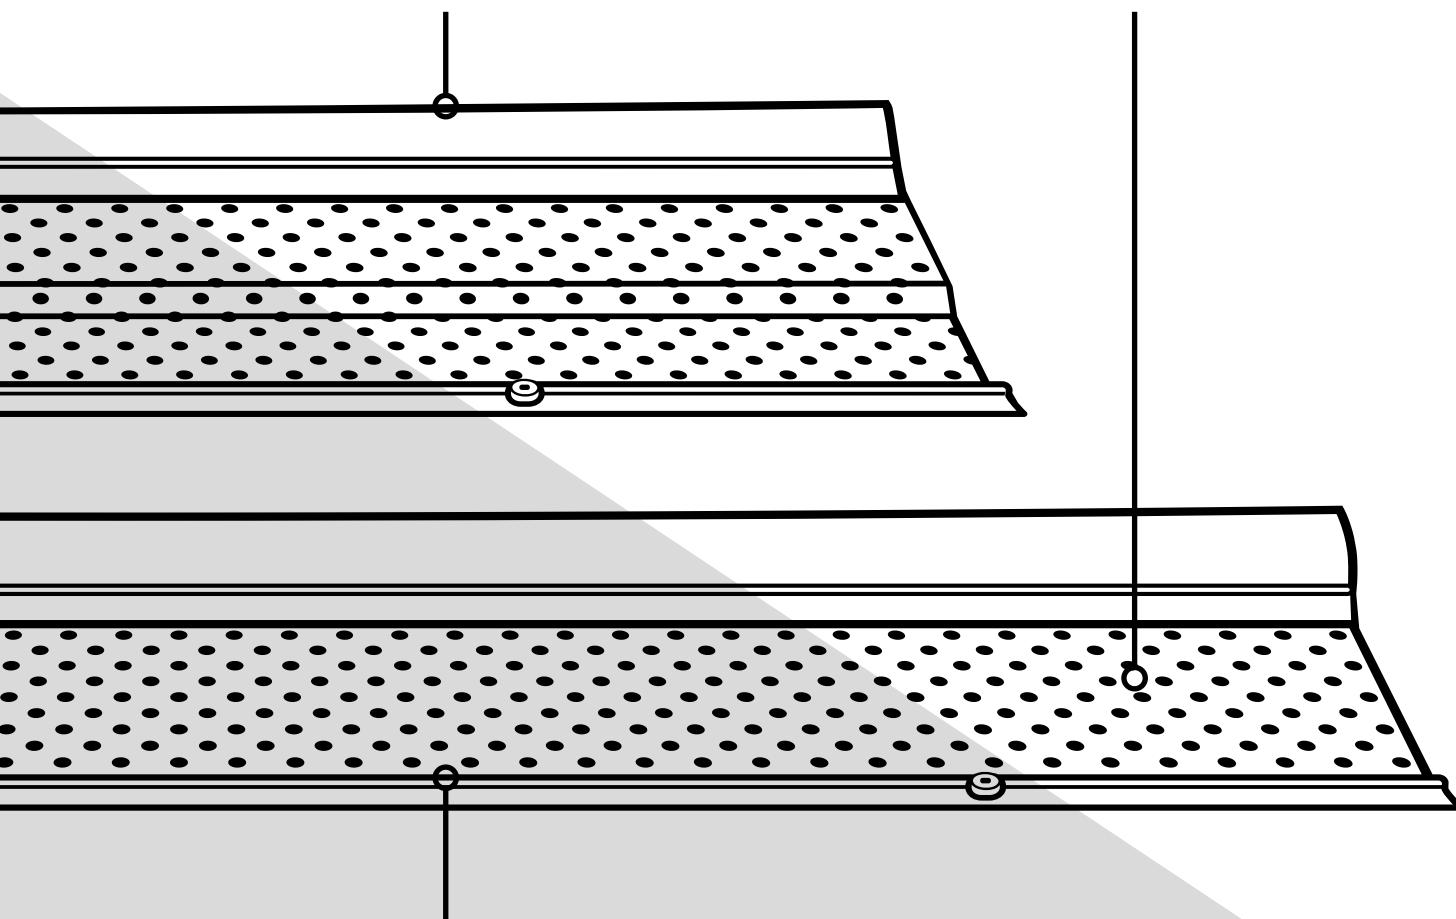

### roll@back™ TECHNOLOGY

This technology sends excess rainwater back into the gutter for truly high-volume drainage capabilities.

# GUTTER SYSTEMS COMPARISON

19

## HANGING SYSTEM



Sturdiness



Drainage



Leaves  
Protection



Needles  
Protection



Easy to  
Maintain



Warranty on  
Sturdiness



Warranty on  
Clog-Free

**trex®**  
Continuous Hanger™



Lifetime

25 years

Spaced Hangers



None

None



None

None

## GUTTER PROTECTION



Sturdiness



Drainage



Leaves  
Protection



Needles  
Protection



Easy to  
Maintain



Warranty on  
Sturdiness



Warranty on  
Clog-Free

**double pro®**  
Continuous Hanger™  
with Built-in Gutter Guard



Lifetime

Lifetime

**gutter clean®**  
Retro-Fit  
Gutter Protection



None

25 years

Metal Screens



None

0 year to  
20/25 years

Micromesh



None

25 years  
to lifetime

Reverse Curve

None



None

Lifetime

Inserts (foam/brush)

None



None

1 year to  
5 years